READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.

INSTRUCTION SHEET NO.

IS:1078

INSTALLATION OF 7•11 REFLECTOR TRIM IN THE 1000 SERIES FRAME-IN KITS

NOTE: Use this Instruction Sheet only when Lytecaster Trim is being installed in the 1000 series Frame-In Kits. If not, disregard this Instruction Sheet. It is recommended you maintain a copy of the following instructions for reference.



Fig. A
FRAME-IN



Fig. B
ROTATE CLIPS



Fig. C
SNAP-ON

Fig. D
PUSH-UP

WARNING: BEFORE INSTALLING REFLECTOR TO FRAME-IN KIT, READ MARKINGS IN REFLECTOR TRIM AND IN SOCKET CUP OF FRAME-IN KIT TO DETERMINE LAMP WATTAGE AND TYPE APPLICABLE FOR YOUR INSTALLATION. IF I.C. TYPE FRAMING KIT IS USED, IT MAY BE INSTALLED IN DIRECT CONTACT WITH INSULATED CEILING. IF A NON I.C. TYPE FRAME-IN KIT IS USED, DO NOT INSTALL INSULATION WITHIN 3 INCHES OF FIXTURE SIDES OR WIRING COMPARTMENT, NOR ABOVE FIXTURE IN SUCH A MANNER TO ENTRAP HEAT.

1. **FRAME-IN (Fig. A)**
   See Frame-In Kit Instruction Sheet for installation procedure.

2. **ROTATE ROTO-CLIPS (Fig. B)** (if Frame-In Kit is so equipped)
   As shown in Fig. E

3. **SNAP-ON (Fig. C)**
   Insert SOCKET CUP in neck of REFLECTOR. Make sure SPRINGS of SOCKET CUP snap into SLOTS of REFLECTOR.

4. **PUSH UP (Fig. D)**
   Push REFLECTOR TRIM straight up until it is tight against ceiling. **Note**: To remove REFLECTOR TRIM turn REFLECTOR TRIM counterclockwise while pulling downward. When using 1004 Series Frame-In Kits, squeeze REFLECTOR SPRING from inside until the TRIM disengages. To retrieve SOCKET CUP, pull on one of the SOCKET SPRING legs to disengage. (Fig. F)

TO LAMP

1. After pushing REFLECTOR TRIM tight against ceiling, twist Lexan DIFFUSER counterclockwise until DIFFUSER disengages, the pull down. (Fig. G)
2. Install proper size lamp as indicated inside the REFLECTOR.
3. Replace DIFFUSER. Line up the SLOTS on DIFFUSER with the BUMPS on the REFLECTOR, push up and twist clockwise until the diffuser engages. (Fig. H)

WARNING: USE ONLY REFLECTOR TRIMS PROVIDED BY LIGHTOLIER INC. USE OF OTHER MANUFACTURERS' REFLECTOR TRIMS VOIDS THE UNDERWRITERS LABORATORIES LISTING AND COULD CONSTITUTE A FIRE HAZARD.



Fig. E

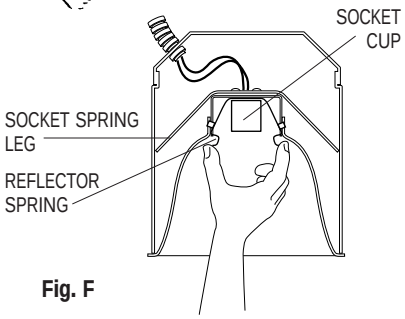

Fig. F

TO OPEN

Fig. G



TO CLOSE

Fig. H

LIGHTOLIER®

LIGHTOLIER a GENLYTE company.
631 Airport Road, Fall River, MA 02720